



BARKI EHF.

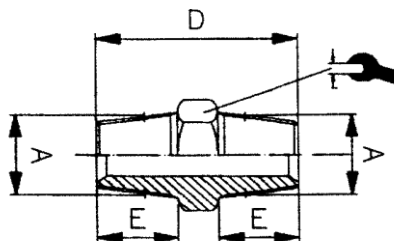

Nippill

Vörunúmer	Heiti	A		D	E	
46-02-441000	Nippill M5	M5		11.5	4.0	8.0
46-02-441002	Nippil 1/8"	1/8"		20.0	8.0	12.0
46-02-441004	Nippill 1/4"	1/4"		27.0	11.0	14.0
46-02-441006	Nippill 3/8"	3/8"		28.0	11.5	17.0
46-02-441008	Nippill 1/2"	1/2"		33.5	14.0	22.0
46-02-441012	Nippill 3/4"	3/4"		40.0	16.5	27.0

SCHEDA TECNICA SERIE "100" RACCORDI STANDARD

I raccordi di linea della nostra serie 100, sono realizzati in Italia, a garanzia di elevati standard di qualità, secondo le normative ISO di riferimento, e rispondono alle seguenti specifiche tecniche e applicative

FLUIDO

Aria compressa, acqua fino a 100 °C (per altri fluidi contattare il nostro UT)

APPLICAZIONI

Circuiti pneumatici, oleodinamici e idraulici

TEMPERATURE E PRESSIONI

Le temperature e le pressioni dipendono generalmente dalle caratteristiche del tubo impiegato. La pressione massima consigliata è 60 bar

FILETTATURE

BSP cilindrica UNI-ISO 228

BSP conica UNI-ISO 7

Metrica ISO/R 262

MATERIALI UTILIZZATI

Ottone UNI EN 12164 CW614N (nichelato)

Ottone UNI EN 12165 CW617N (nichelato)

NBR 70 DWGV-EN549 UL157 (guarnizioni tenuta)

Nylon/Alluminio (rondelle)

STANDARD "100" SERIES TECHNICAL SHEET

The standard 100 series fittings are produced in Italy according to the reference ISO norms as warranty of high quality level and answer to the followings technical specifications and applications:

FLUIDS

Compressed air, water up to 100 °C (for different fluid pls contact our Technical

APPLICATIONS

Pneumatic, oleodynamic and hydraulic circuits

TEMPERATURES AND PRESSURES

Temperatures and pressures usually depend by the technical features of the employed tubes. Max pressure suggested 60 bar.

THREAD TYPE

BSP parallel UNI-ISO 228

BSP tapered UNI-ISO 7

Metric ISO/R 262

MATERIALS

Brass UNI EN 12164 CW614N (nickel Plated)

Brass UNIEN 12165 CW617N (nickelPlated)

NBR 70 DWGV-EN549 UL157 (seals)

Nylon/Aluminium (washers)