


TRICOFLEX

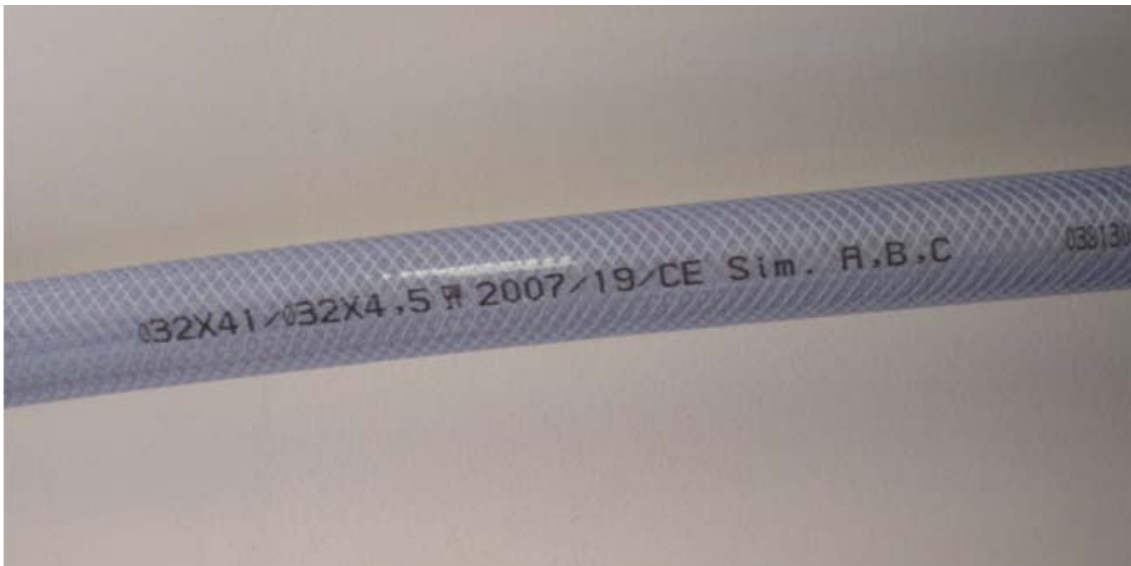

T.C.F

Vörunúmer	Innanmál mm.	Utanmál mm.	Þyngd g/m	V.Þrýstingur bar	B.radíus mm
20-06-040008	5,0	10,0	73	10	44
20-06-063011	6,3	11,0	77	10	50
20-06-080013	8,0	13,0	100	10	65
20-06-100015	10,0	15,0	118	10	80
20-06-125018	12,5	18,0	165	10	110
20-06-160022	16,0	22,0	216	10	145
20-06-190026	19,0	26,0	300	10	174
20-06-250033	25,0	33,0	440	10	260
20-06-300040	30,0	40,0	665	9	300
20-06-380048	38,0	48,0	725	6	400
20-06-500064	50,0	60,0	1150	6	500

Alhliða sterk vatns- og loftslanga. Má nota í matvæli. ekki ætluð fyrir olíur.

Hitapól: -15°C + 60°C

Innra lag: Glært PVC

Ytra lag: Glært PVC