


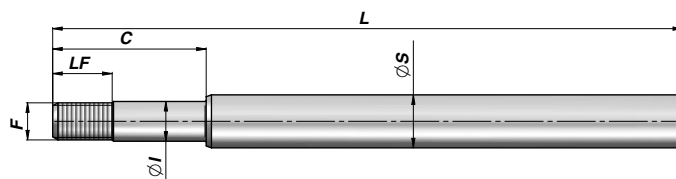


Codice Code Bestell-Nr.	ØS	Alesaggio Bore Kolben-Ø	Corsa Stroke Hub	L	ØI	C	F	LF	kg
SBL0160250050	16	25	50	128	11	31	M10x1,5	24,5	0,18
SBL0160250100			100	178					0,25
SBL0160250150			150	228					0,33
SBL0160250200			200	278					0,40
SBL0200320050	20	32	50	147	15	48	M14x1,5	21	0,30
SBL0200320100			100	197					0,43
SBL0200320150			150	247					0,55
SBL0200320200			200	297					0,67
SBL0200320250			250	347					0,79
SBL0200320300			300	397					0,91
SBL0200320400			400	497					1,10
SBL0200320500			500	597					1,40
SBL2010100	20	40	100	220	15	58	M14x1,5	23	0,48
SBL2010150			150	270					0,60
SBL2010200			200	320					0,72
SBL2010250			250	370					0,84
SBL2010300			300	420					0,97
SBL2010350			350	470					1,09
SBL2010400			400	520					1,21
SBL2010450			450	570					1,33
SBL2010500	500	620	1,46						
SBL2510100	25	40	100	220	15	58	M14x1,5	23	0,70
SBL2510150			150	270					0,89
SBL2510200			200	320					1,08
SBL2510250			250	370					1,27
SBL2510300			300	420					1,47
SBL2510350			350	470					1,66
SBL2510400			400	520					1,85
SBL2510450			450	570					2,04
SBL2510500			500	620					2,23
SBL2510550			550	670					2,42
SBL2510600	600	720	2,61						
SBL2520100	25	50	100	230	20	65	M20x1,5	30	0,79
SBL2520150			150	280					0,98
SBL2520200			200	330					1,17
SBL2520250			250	380					1,37
SBL2520300			300	430					1,56
SBL2520350			350	480					1,75
SBL2520400			400	530					1,94
SBL2520450			450	580					2,13
SBL2520500			500	630					2,32
SBL2520550			550	680					2,51
SBL2520600			600	730					2,71
SBL2520800			800	930					3,47
SBL2521000	1000	1130	4,24						

**M250**

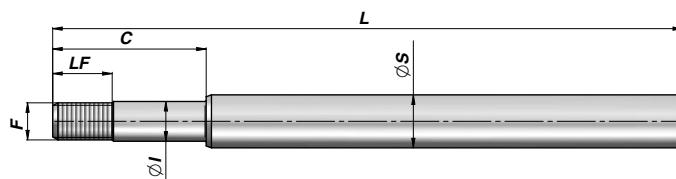

Codice Code Bestell-Nr.	ØS	Alesaggio Bore Kolben-Ø	Corsa Stroke Hub	L	ØI	C	F	LF	kg
SBL3020100	30	50	100	230	20	65	M20x1,5	30	0,90
SBL3020150			150	280					1,12
SBL3020200			200	330					1,34
SBL3020250			250	380					1,57
SBL3020300			300	430					1,79
SBL3020350			350	480					2,01
SBL3020400			400	530					2,24
SBL3020450			450	580					2,46
SBL3020500			500	630					2,68
SBL3020550			550	680					2,91
SBL3020600			600	730					3,13
SBL3020700			700	830					3,58
SBL3020800			800	930					4,02
SBL3021000			1000	1130					4,92
SBL3021500	1500	1630	7,17						
SBL3030100	30	60/70	100	248	20	75	M20x1,5	30	1,14
SBL3030150			150	298					1,41
SBL3030200			200	348					1,69
SBL3030250			250	398					1,97
SBL3030300			300	448					2,24
SBL3030350			350	498					2,52
SBL3030400			400	548					2,79
SBL3030450			450	598					3,07
SBL3030500			500	648					3,34
SBL3030550			550	698					3,62
SBL3030600			600	748					3,89
SBL3030800			800	948					5,00
SBL3031000			1000	1148					6,10
SBL3530100			35	60/70					100
SBL3530150	150	298			1,86				
SBL3530200	200	348			2,23				
SBL3530250	250	398			2,61				
SBL3530300	300	448			2,98				
SBL3530350	350	498			3,36				
SBL3530400	400	548			3,73				
SBL3530450	450	598			4,11				
SBL3530500	500	648			4,48				
SBL3530550	550	698			4,86				
SBL3530600	600	748			5,23				
SBL3530800	800	948			6,74				
SBL3531000	1000	1148			8,24				
SBL3531500	1500	1648			11,99				
SBL4040200	40	60/70	200	348	27	75	M27x2	30	3,01
SBL4040250			250	398					3,50
SBL4040300			300	448					3,99
SBL4040350			350	498					4,48
SBL4040400			400	548					4,97
SBL4040450			450	598					5,46
SBL4040500			500	648					5,95
SBL4040550			550	698					6,44
SBL4040600			600	748					6,93
SBL4040800			800	948					8,89
SBL4041000			1000	1148					10,85
SBL4041500			1500	1648					15,58



Codice Code Bestell-Nr.	ØS	Alesaggio Bore Kolben-Ø	Corsa Stroke Hub	L	ØI	C	F	LF	kg
SBL0400630200	40	63	200	348	24	75	M24x2	35	2,92
SBL0400630250			250	398					3,40
SBL0400630300			300	448					3,90
SBL0400630400			400	548					4,88
SBL0400630500			500	648					5,87
SBL0400630600			600	748					6,85
SBL0400630800			800	948					8,80
SBL0400631000			1000	1148					10,76
SBL4050200	40	80	200	368	27	83	M27x2	38	3,17
SBL4050250			250	418					3,66
SBL4050300			300	468					4,15
SBL4050400			400	568					5,13
SBL4050500			500	668					6,11
SBL4050600			600	768					7,09
SBL4050800			800	968					9,05
SBL4051000			1000	1168					11,01
SBL5050200	50	80	200	368	27	83	M27x2	38	4,74
SBL5050250			250	418					5,50
SBL5050300			300	468					6,27
SBL5050400			400	568					7,80
SBL5050500			500	668					9,33
SBL5050600			600	768					10,86
SBL5050800			800	968					13,93
SBL5051000			1000	1168					16,99
SBL5051500	1500	1668	24,64						
SBL0500900300	50	90	300	471	33	88	M33x2	43	6,46
SBL0500900400			400	571					8,00
SBL0500900500			500	671					9,54
SBL0500900600			600	771					11,09
SBL0500900800			800	971					14,17
SBL0500901000			1000	1171					17,25
SBL5060200	50	100	200	395	33	88	M33x2	43	5,29
SBL5060250			250	445					6,06
SBL5060300			300	495					6,82
SBL5060400			400	595					8,35
SBL5060500			500	695					9,89
SBL5060600			600	795					11,42
SBL5060800			800	995					14,48
SBL5061000			1000	1195					17,54
SBL6060300	60	100	300	495	33	88	M33x2	43	9,56
SBL6060400			400	595					11,77
SBL6060500			500	695					13,98
SBL6060600			600	795					16,18
SBL6060800			800	995					20,59
SBL6061000			1000	1195					25,00
SBL6061500	1500	1695	36,00						

MATERIALE - MATERIAL:

ACCIAIO - STEEL - STAHL: UNI C45 SAE 1045 - CROMO-CHROME-CHROM: 25 MICRON ±5 Rating 9/120 h ISO 10289 - 1999/ISO 9227-NSS