




Filter

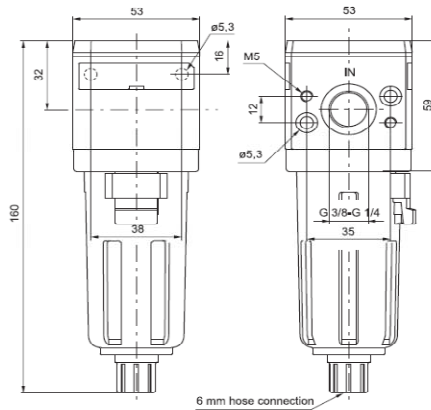

Ordering code

17201 **C S I**

CONNECTIONS

- A = G 1/4"
- B = G 3/8"

FILTER PORE SIZE


- A = 5µ
- B = 20µ
- C = 50µ

TYPE

- S = Automatic drain

Example: 17201 A B
Filter size 2 with G 1/4" connections and filter pore size 20µ.

Flow rate curves



Operational characteristic

- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Double filtering action : by air centrifuging and by replaceable and reusable HDPE porous filter element.
- Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up wards.
- Possibility to see the water level on 360°.
- Automatic water drainage bowl available on request.

Technical characteristic

Connections	G 1/4" - G 3/8"
Max working pressure (bar)	13 bar - 1,3 MPa
Minimum working pressure with automatic drain (bar)	0,5
Maximum working pressure with automatic drain (bar)	10
Temperature °C	50°C
Weight	gr. 255
Filter pore size	5µ - 20µ - 50µ
Bowl capacity	30 cm³
Assembly position	Vertical
Wall fixing screw	M5
Max. fittings torque	25 Nm