




Filter

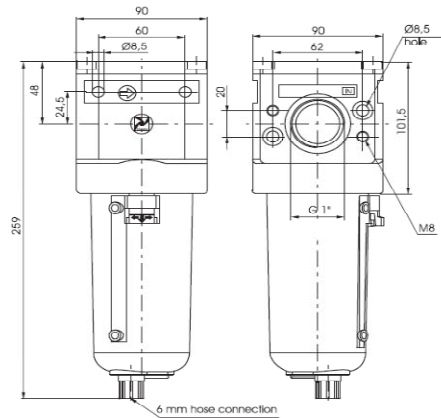


Ordering code

17401B.S.T

FILTER PORE SIZE	
S	A = 5μ
	B = 20μ
	C = 50μ
TYPE	
T	S = Automatic drain

Example: 17401B.B  
Filter with G 1" connections and filter pore size 20μ.

Flow rate curves



Operating Characteristics

- Body made with light alloy.
- Wall mounting possibility with M8 screws protected by covers.
- Double filtering action: by air centrifuging and by replaceable and reusable HDPE porous filter element.
- Light alloy bowl c/w level indicator connected to the body with bayonet cap and safety button.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Automatic water drainage bowl available on request.

Technical characteristics

Connections	G 1"
Max working pressure (bar)	13 bar - 1.3 MPa
Minimum working pressure with automatic drain (bar)	0.5
Maximum working pressure with automatic drain (bar)	10
Temperature °C	50°C
Weight	gr. 1700
Filter pore size	5μ - 20μ - 50μ
Bowl capacity	178 cm <sup>3</sup>
Assembly position	Vertical
Wall fixing screw	M8