




Lubricator

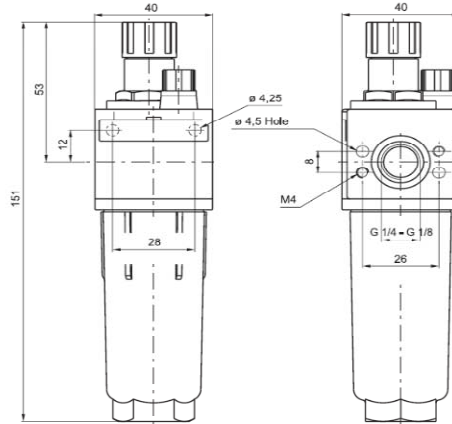


Ordering code

1700301

VERSION	
0	Zinc alloy body
1	Technopolymer body
CONNECTIONS	
A	G 1/8"
B	G 1/4"
TYPE	
P	Bowl protection

Example: 17103A.P
Lubricator size 1 with G 1/8" connections and bowl protection with technopolymer body

Flow rate curves

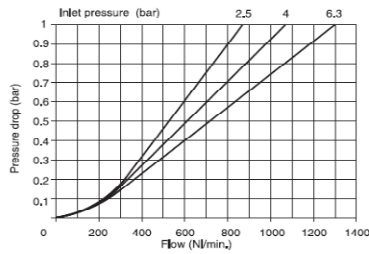

Operational characteristic

- Fog type lubrication with variable section orifice according to the flow.
- Zinc alloy body or reinforced technopolymer body with threaded aluminum insert connections.
- Wall mounting possibility with M4 screws protected by covers.
- Transparent technopolymer bowl screwed to the body.
- Technopolymer shock resistant bowl protection.
- Possibility to see the min. and max. oil level on 360° also with bowl protection assembled.
- Transparent technopolymer sight dome with adjusting handle.
- Oil filling plug.

Technical characteristic

Connections	G 1/8" - G 1/4"
Max working pressure (bar)	13 bar - 1.3 MPa
Temperature °C	50°C
Weight with technopolymer body	gr. 108
Weight with zinc alloy body	gr. 258
Indicative oil drip rate	1 drop every 300/600 NI
Oil type	FD22 - HC32
Bowl capacity	36 cm ³
Assembly position	Vertical
Wall fixing screw	M4
Max. fittings torque on zinc alloy body	30 Nm
Max. fittings torque on technopolymer body	15 Nm
Min. operational flow at 6.3 bar	10 NI/min.