




Lubricator

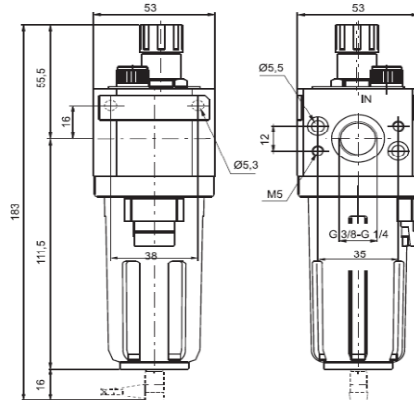

Ordering code

17203 **C** **I**

CONNECTIONS

- C** A = G 1/4"
- R = G 3/8"

TYPE


- I** MA = Min. oil level indicator N.O. with plug connector
- MC = Min. oil level indicator N.C. with plug connector

Example: 17203A : Lubricator with G 1/4" connections.

Note: on the MA version the contact is open when oil is present, on the MC version the contact is closed when oil is present

3

Flow rate curves

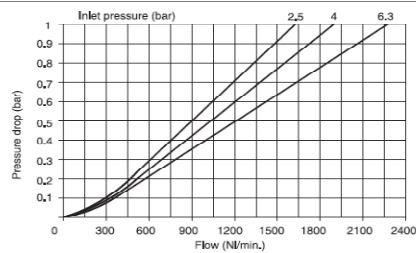

Operational characteristic

- Fog type lubrication with variable section orifice according to the flow.
- Body made with light alloy.
- Wall mounting possibility with M5 screws protected by covers.
- Transparent technopolymer bowl with shock resistant technopolymer protection
- Possibility to see the min. and max. level on 360° also with bowl protection assembled.
- Bowl assembled to the body with bayonet cap and safety button.
- Transparent technopolymer sight dome with adjusting handle.
- Oil filling plug.
- Electrical connector for low level indication.
- Use the C1, C2 or C3 lead for connection (see section 6 "Sensors").

Technical characteristic

Connections	G 1/4" - G 3/8"
Max working pressure (bar)	13 bar - 1,3 MPa
Temperature °C	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 280
Indicative oil drip rate	1 drop every 300/600 NI
Oil type	FD22 - HG32
Bowl capacity	52 cm ³
Assembly position	Vertical
Wall fixing screw	M5
Min. operational flow at 6,3 bar	20 NI/min
Max. fittings torque	25 Nm