


Air, fumes and dust

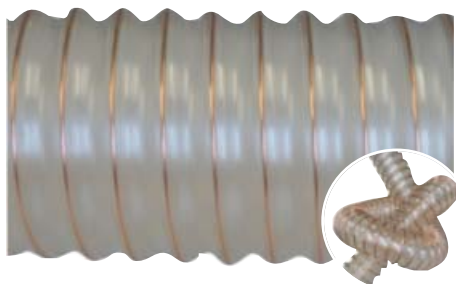


GAINES TAPE PUR 400/600

+90
°C
-40

Flexible ductings in polyurethane reinforced with a metallic spiral.

TAPE PUR 400: Standard quality
TAPE PUR 600: Heavy duty



- 1 Metallic spiral
2 Wall in transparent polyurethane

Without marking

APPLICATIONS

Suction of:

- sawdust and chips
- air and fumes

SECTORS OF ACTIVITY

- Wood industry
- Chemical industry

ADVANTAGES

TAPE PUR 400 and 600 ductings have a good mechanical resistance with a high flexibility. They have a wide temperature range of use.

CONNECTORS

Connectors with wire collars. Small diameters can be screwed into themselves. We recommend checking before assembly that the fittings cannot harm the inner wall.

CHEMICAL RESISTANCE

See table page 70 to 73 column C.

mm	± mm	mm	g/m	V mbar	mm	TAPE PUR 400
						10 m
60	0/+0,5	0,4	340	160	21	175252
76	0/+0,5	0,4	420	110	27	175278
80	0/+0,5	0,4	440	100	28	175033
102	0/+1,0	0,4	520	70	35	175046
120	0/+1,0	0,4	600	60	43	175059
127	0/+1,0	0,4	610	50	44	175307
140	0/+1,0	0,4	710	50	48	175320
152	0/+1,0	0,4	780	50	53	175062
160	0/+1,0	0,4	810	40	57	175323
203	0/+2,0	0,4	1080	30	70	175088
254	0/+2,0	0,4	1300	14	88	175335
300	0/+2,0	0,4	1700	11	105	175090

mm	± mm	mm	g/m	V mbar	mm	TAPE PUR 600	
						10 m	15 m
40	0/+0,5	0,6	300	280	20		174698
51	0/+0,5	0,6	380	234	25		174701
60	0/+0,5	0,6	440	189	30		174714
102	0/+0,6	0,6	680	81	51		174771
120	0/+0,6	0,6	790	68	60		174797
127	0/+0,6	0,6	820	54	63		174800
152	0/+0,6	0,6	990	54	75		174839
160	0/+0,6	0,6	1020	47	80		174842
180	0/+0,8	0,6	1170	36	90		174855
305	0/+0,8	0,6	2150	13	153	174900	

Gaine TAPE PUR 600

is suitable for dried foodstuffs only



(EU) N° 10/2011